

Description

PSC5415E is a switch-mode charging IC with maximum 1.75A current for lithium battery and lithium polymer battery. The PSC5415E has 5V, 700mA OTG function, and I2C function. The charging parameter such as charging current, full charging voltage and input current can be precisely configured by I2C function. The package type is WLCSP (1.901mmx1.501mm) with 20 pins.

The PSC5415E is designed with standard four-stage charging process: active, pre-charging, constant current, constant voltage and perfect protection mechanism for over current, over voltage, under voltage and over temperature. It is integrated with synchronous PWM control, high power MOSFET, and high voltage OVP circuits. The PSC5415E has high charging efficiency (94%), low internal resistance (45mΩ), and high DC withstand voltage (29V).

Feature

- Fully Integrated, High-Efficiency Charger for Single-Cell Li-Ion and Li-Polymer Battery Packs
- Charge Voltage Accuracy: $\pm 0.5\%$ 25°C
- $\pm 5\%$ Charge Current Regulation Accuracy
- 29V Absolute Maximum Input Voltage
- 6V Maximum Input Operating Voltage
- 1.75A Maximum Charge Rate
- 5V, 700mA Boost Mode for USB OTG for 3.0 to 4.5V Battery Input
- 1.901 mm x 1.501mm 20-Pin WCSP Package
- Programmable through I²C Interface:
 - Input Current
 - Fast-Charge/Termination Current
 - Charger Voltage
 - Termination Enable
- Synchronous Buck PWM Controller with Wide Duty Cycle Range
- Small Footprint 1μH External Inductor
- Perfect protection mechanism:
 - OVP, OCP, OTP

Application

- Cellular Phones, Smart Phones, PDAs
- Tablet, Portable Media Players
- Gaming Device, Digital Cameras

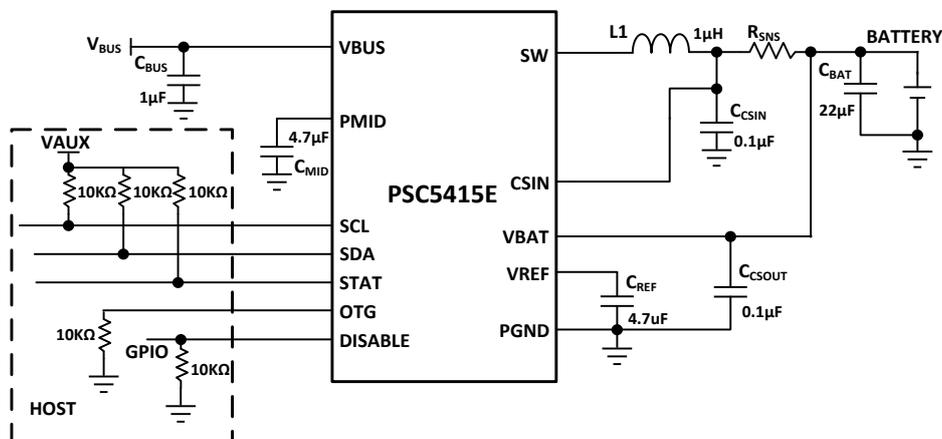


Figure 1: Typical Application

Recommended External Components

Key Components	Recommended specification
L1	Inductor, 1.0-2.2uH, +-20%, Isat>3A
C _{MID}	Capacitor, 4.7μF, +-10%, >6V
C _{REF}	Capacitor, 2.2μF, +-10%, >10V ,0402 or Capacitor, 4.7μF, +-10%, >6V,0402
C _{BUS}	Capacitor, 1μF, +-10%, >25V

Block Diagram


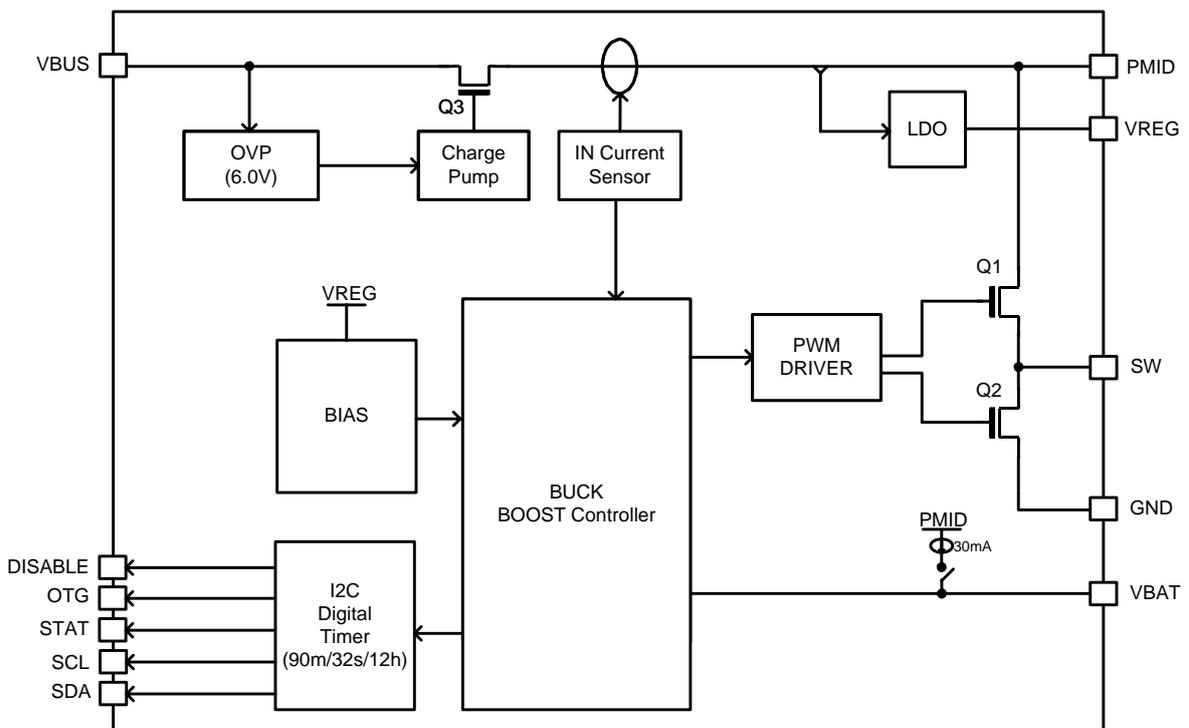


Figure 2: IC and System Block Diagram

Marking Information



P15E:PSC5415E
XXXXX: Production Tracing Code

Pin Configuration

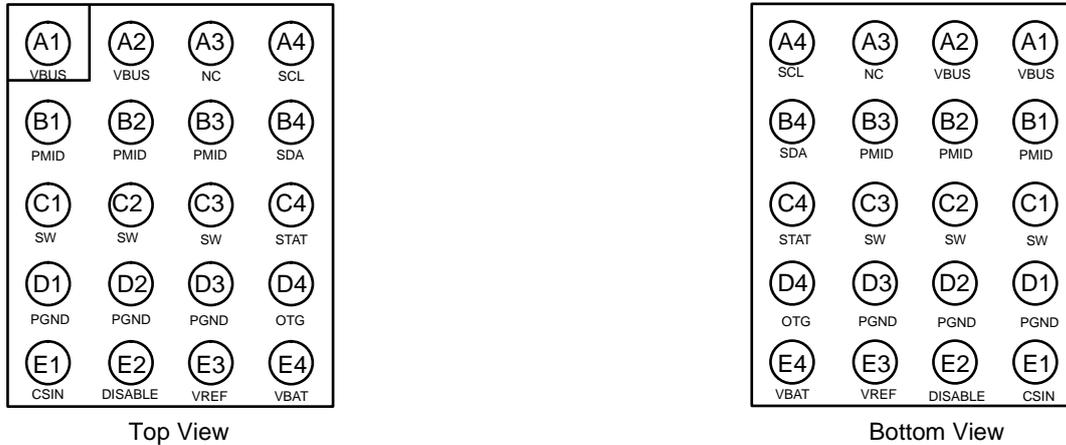


Figure 3: WLCSP-20 Pin Assignments

Pin Definitions

Pin#	Name	Description
A1,A2	VBUS	Charger Input Voltage and USB-OTG output voltage. Bypass with 1μF capacitor to PGND
A3	NC	NC.
A4	SCL	I²C Interface Serial Clock. This pin should not be left floating.
B1-B3	PMID	Power Input Voltage. Power input to the charger regulator, bypass point for the input current sense, and high-voltage input switch. Bypass with a minimum of 4.7μF, 10V capacitor to PGND.
B4	SDA	I²C Interface Serial Data. This pin should not be left floating.
C1-C3	SW	Switching Node. Connect to output inductor.
C4	STAT	Status. Open-drain output indicating charge status. The IC pulls this pin LOW when charge is in process.
D1-D3	PGND	Power Ground. Power return for gate drive and power transistors. The connection from this pin to the bottom of C _{MID} should be as short as possible.
D4	OTG	On-The-Go. Enables boost regulator in conjunction with OTG_EN and OTG_PL bits
E1	CSIN	Current-Sense Input. Connect to the sense resistor in series with the battery. The IC uses this node to sense current into the battery. Bypass this pin with a 0.1μF capacitor to PGND.
E2	DISABLE	Charge Disable. If this pin is “1”, charging is disabled. When LOW, charging is controlled by I2C registers.
E3	VREF	Bias voltage. Connect to a 4.7uF capacitor to PGND. The output voltage is PMID, which is limited to 6.5V. Any resistor loading to VREF is NOT recommended.
E4	VBAT	Battery Voltage. Connect to the positive (+) terminal of the battery pack. Bypass with a 0.1μF capacitor to PGND if the battery is connected through long leads.

Product dimension

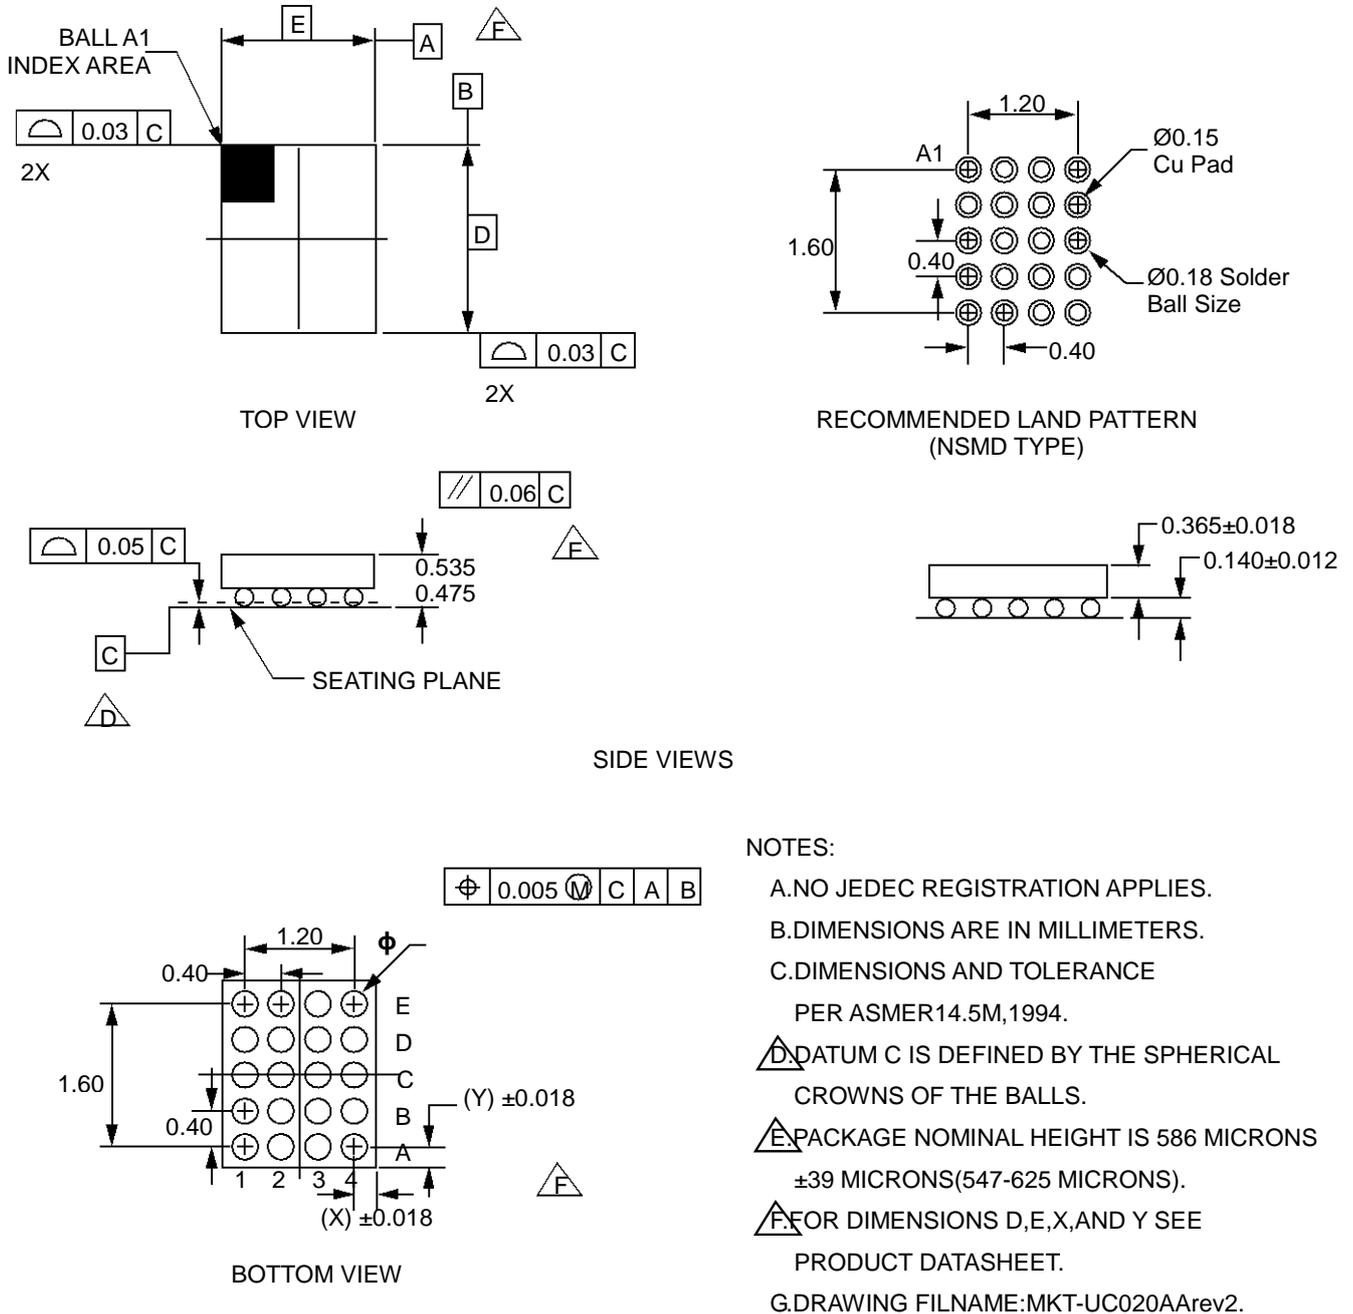


Figure 41. 20-Ball WLCSP, 4x5 Array, 0.4mm Pitch, 150µm Ball

Product-Specific Dimensions (mm)

Product	D	E	X	Y	Φ
PSC5415E	1.901±0.030	1.501±0.030	0.150	0.150	0.150±0.020

IMPORTANT NOTICE

 and **Prisemi**[®] are registered trademarks of **Prisemi Electronics Co., Ltd (Prisemi)** ,Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. “Typical” parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Prisemi reserves the right to change the circuitry and/or specifications without notice at any time. Customers should obtain the latest relevant information and datasheets before placing orders and should verify that such information is current and complete.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**[®] is a registered trademark of Prisemi Electronics.

All rights are reserved.