
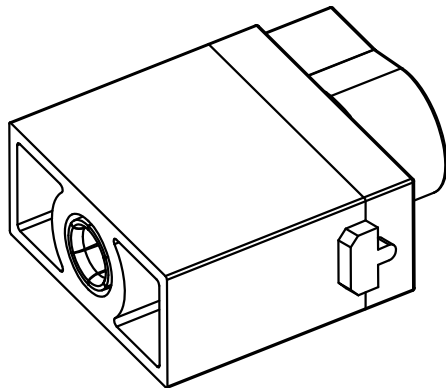
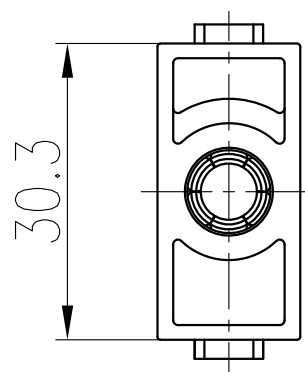


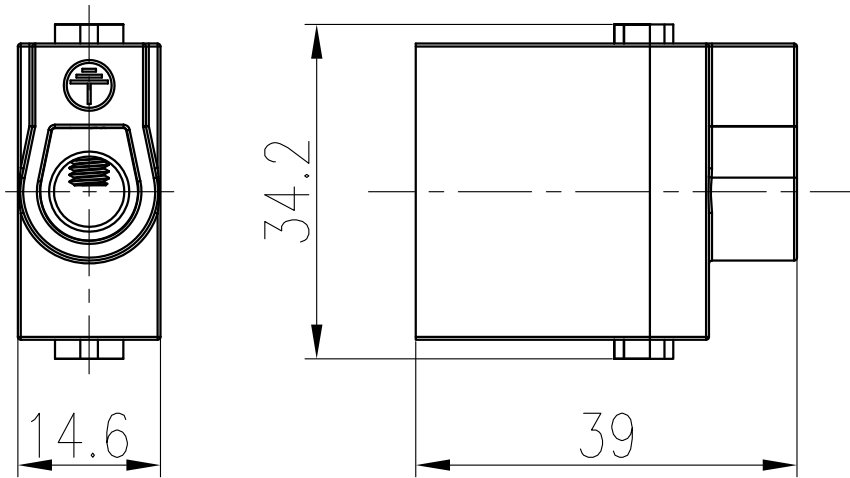

技术参数:

插芯

- 接地针数: 1
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围: -40°C - $+125^{\circ}\text{C}$
- 可插拔次数: ≥ 500

接地针:

- 接线方式: 螺钉连接
- 材料: 铜合金
- 表面处理: 镀银
- 线径范围: $1.5-16\text{mm}^2$

Technical specification:

- Inserts:
- No.of PE contact: 1
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range: -40°C - $+125^{\circ}\text{C}$
- Mating cycles: ≥ 500

PE contacts:

- Terminal: Screw termination
- Material: Copper alloy
- Surface: hard-silver plated
- Wire gauge: $1.5-16\text{mm}^2$

						表面处理 Finish	—			图号 Drawing No.	—	
						材料 Material	—			产品代号 Part Code	HMPE-001-F	
标记 Mark	处数 Number	变更描述/Description			签名 Signature		日期 Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品料号 Part No.
绘图 Drawn	姓名/Name	日期/Date			姓名/Name	日期/Date	产品名称 Part Name					—
审核 Checked	LJ ZOU	21.12.2018	标准化 Stand.		—	—	1:1	V1.0	28.3g	—	 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.,LTD	
工艺 Process	HZ LAN	21.12.2018										
	—	—	批准 Approved	HQ ZHANG	21.12.2018			All Dimensions in mm Original Size DIN A 4				