





- 1.电路 CIRCUIT: ON/OFF
2.快插端子 QUICK CONNECTOR TYPE
3.额定值 RATING: 10A GP 125/250VAC T125/55(C-UL)
16(6)A 250V~T125/55(ENEC15)
12(4)A 250V~T85/55(NEMKO;CQC)
4.所有部件均使用环保材料
ALL MATERIALS USING MEET THE RoHS DIRECTIVE

电话: 0769-82310511-867



邮箱: hooya89@hooya.hk

PANEL THICKNESS	X	Y
1.2~2.0mm	26.0 ⁺⁰ _{-0.1} mm	12.1 ^{+0.1} ₋₀ mm
2.0~3.2mm	26.5 ⁺⁰ _{-0.1} mm	12.1 ^{+0.1} ₋₀ mm


PANEL HOLE SIZE

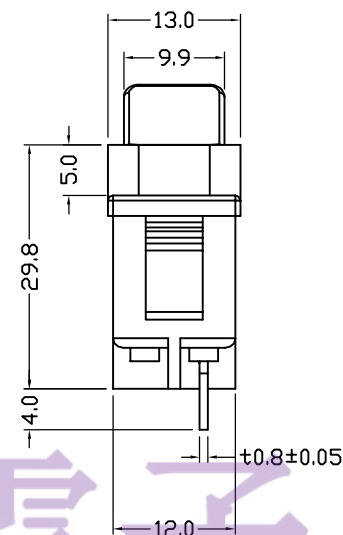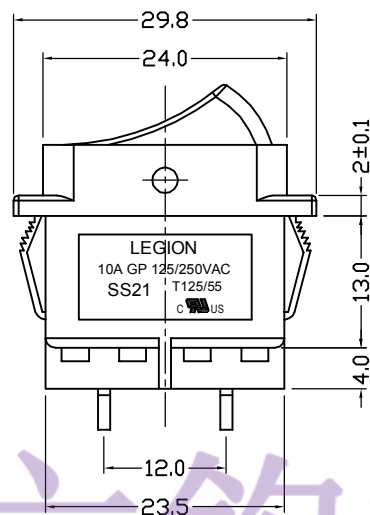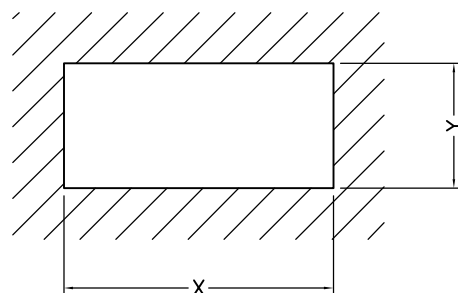

SWITCH CIRCUIT

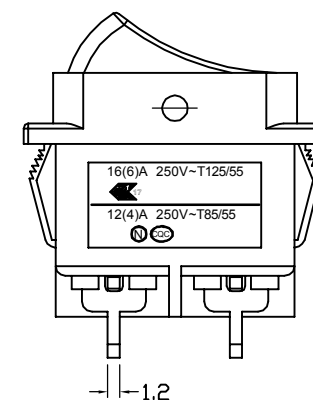

PCB MOUNTING HOLE ARRANGEMENT



品 名	上盖/基座(颜色)
SS21-WWNS5-S2-R	白色/白色
SS21-BBNS5-S2-R	黑色/黑色

5	→	10	→	DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM			
4	→	9	→	RANGE	TOLERANCE					SCALE	NO			
3	→	8	→	X	±0.30					MAT'L	***			
2	→	7	→	X.X	±0.20					MATERIAL NO.			DRAWING NO.	REV.
1	→	6	→	X.XX	±0.10									
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1'	LEGION ELECTRONIC & HARDWARE CO., LTD.				SS21-WWNS5-S1-R	*****	A0		