

## Description

The MOC303X, MOC304X, MOC306X and MOC308X series combine an AlGaAs infrared emitting diode as the emitter which is optically coupled to a monolithic silicon random-phase photo triac in a plastic DIP6 package with different lead forming options.


## Features

- High isolation 5000 VRMS
- DC input with zero-cross photo triac output
- Operating temperature range - 40 °C to 100 °C
- REACH & RoHS compliance
- MSL class 1
- Regulatory Approvals
  - UL - UL1577
  - VDE - EN60747-5-5(VDE0884-5)
  - CQC – GB4943.1, GB8898

## Applications

- Solenoid/valve controls
- Lighting controls
- Motor controls
- Temperature controls
- Static AC power switches
- Solid state relays
- Interfacing microprocessors to 115 to 240VAC peripherals


## SCHEMATIC

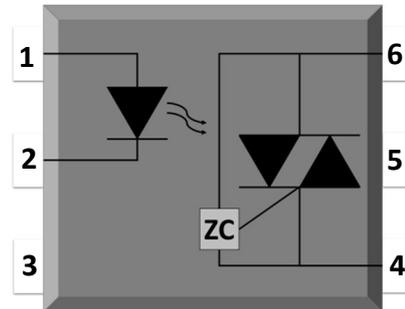

## PIN DEFINITION

- |                   |                     |
|-------------------|---------------------|
| <b>1. Anode</b>   | <b>4. Terminal</b>  |
| <b>2. Cathode</b> | <b>5. Substrate</b> |
| <b>3. NC</b>      | <b>6. Terminal</b>  |

## PACKAGE OUTLINE

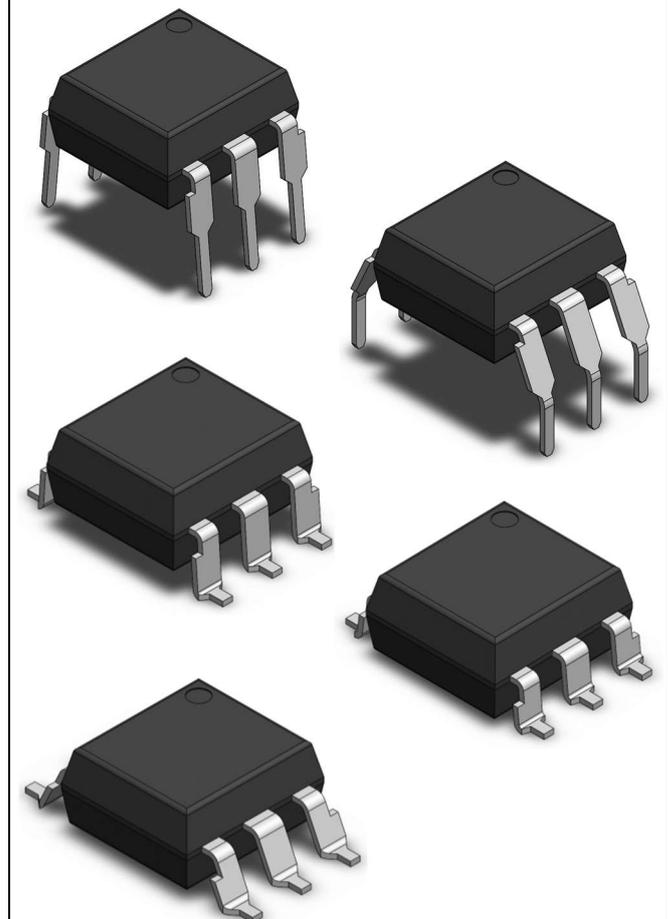

ABSOLUTE MAXIMUM RATINGS				
PARAMETER	SYMBOL	VALUE	UNIT	NOTE
INPUT				
Forward Current	$I_F$	60	mA	
Reverse Voltage	$V_R$	6	V	
Junction Temperature	$T_j$	125	°C	
Input Power Dissipation	$P_I$	100	mW	
OUTPUT				
Off-state Output Terminal Voltage	MOC303X	$V_{DRM}$	250	V
	MOC304X		400	
	MOC306X		600	
	MOC308X		800	
Peak Repetitive Surge Current PW=100 $\mu$ s, 120pps	$I_{TSM}$	1	A	
Junction Temperature	$T_j$	125	°C	
Output Power Dissipation	$P_o$	300	mW	
COMMON				
Total Power Dissipation	$P_{tot}$	400	mW	
Isolation Voltage	$V_{iso}$	5000	V <sub>rms</sub>	1
Operating Temperature	$T_{opr}$	-40~100	°C	
Storage Temperature	$T_{stg}$	-55~125	°C	
Soldering Temperature	$T_{sol}$	260	°C	2

Note 1. AC For 1 Minute, R.H. = 40 ~ 60%

Note 2. For 10 seconds


ELECTRICAL OPTICAL CHARACTERISTICS at Ta=25°C							
PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION	NOTE
INPUT							
Forward Voltage	$V_F$	-	1.24	1.4	V	$I_F=10\text{mA}$	
Reverse Current	$I_R$	-	-	10	$\mu\text{A}$	$V_R=6\text{V}$	
Input Capacitance	$C_{in}$	-	8.5	250	pF	$V=0, f=1\text{kHz}$	
OUTPUT							
Peak Off-state Current, Either Direction	$I_{DRM}$	-	-	100	nA	$V_{DRM}=\text{Rated } V_{DRM}$ $I_F=0$	3
Peak On-state Current, Either Direction	$V_{TM}$	-	1.59	2.5	V	$I_{TM}=100\text{mA}$	
Critical Rate of Rise of Off-state Voltage	$dV/dt$	1000	-	-	V/ $\mu\text{s}$	$V_{PEAK}=\text{Rated } V_{DRM}$	4
TRANSFER CHARACTERISTICS							
LED Trigger Current	MOC3031,MOC3041, MOC3061,MOC3081	$I_{FT}$	-	-	15	mA	Terminal Voltage = 3V $I_{TM}=100\text{mA}$
	MOC3032,MOC3042, MOC3062,MOC3082		-	-	10		
	MOC3033,MOC3043, MOC3063,MOC3083		-	-	5		
Holding Current	$I_H$	-	237	-	$\mu\text{A}$		
Isolation Resistance	Riso	$10^{12}$	$10^{14}$	-	$\Omega$	DC500V, 40 ~ 60% R.H.	
Floating Capacitance	$C_{IO}$	-	0.4	-	pF	$V=0, f=1\text{MHz}$	

Note3. Test voltage must be applied within  $dV/dt$  rating.


Note4. Refer to Fig.15 & Fig.16

**CHARACTERISTIC CURVES**


**Fig.1 Forward Current vs. Ambient Temperature**

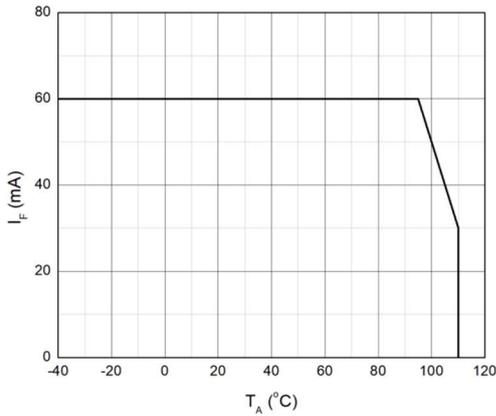


**Fig.2 On-state Terminal Current vs. Ambient Temperature**

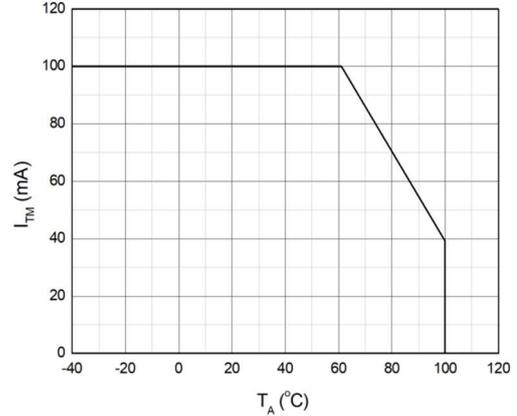


**Fig.3 Forward Current vs. Forward Voltage**

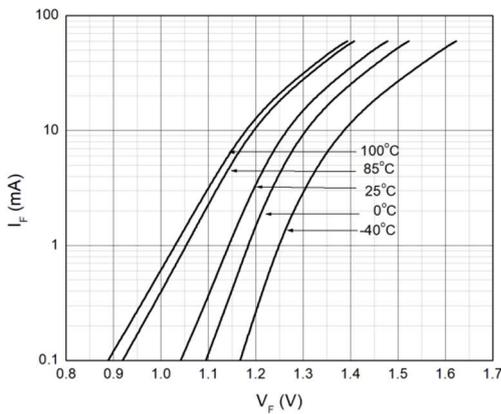


**Fig.4 Off-state Terminal Current vs. Ambient Temperature**

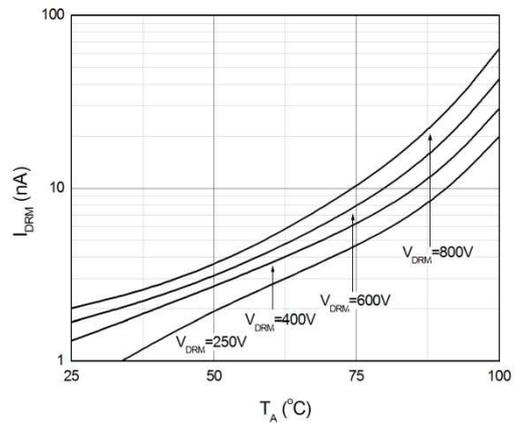

**Fig.5 Normalized Off-state Terminal Voltage vs. Ambient Temperature**

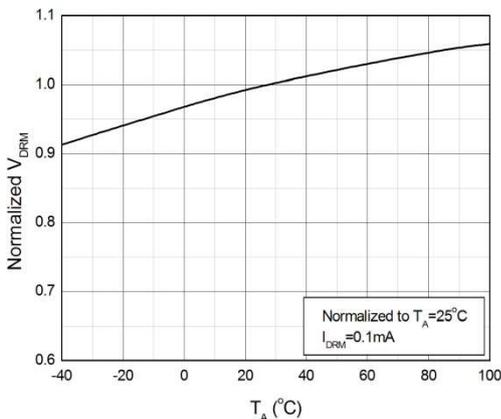


**Fig.6 Normalized Trigger Current vs. LED Trigger Pulse Width**

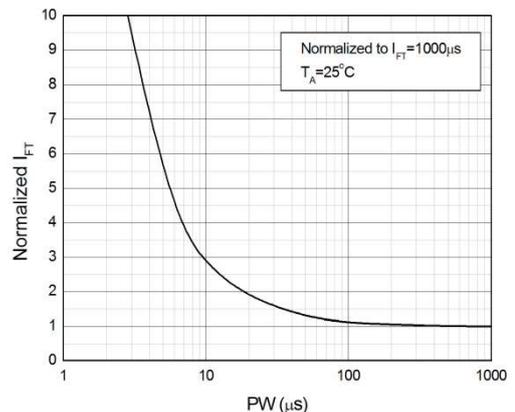


**CHARACTERISTIC CURVES**


**Fig.7 Normalized Trigger Current vs. Ambient Temperature**

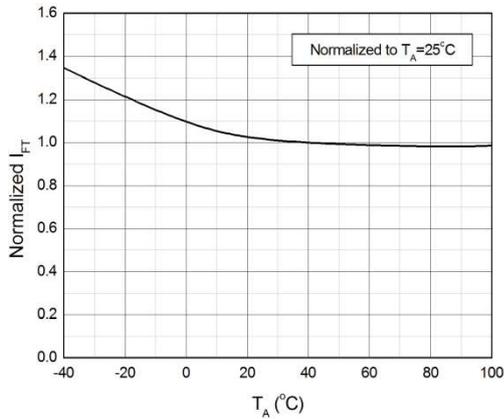


**Fig.8 On-state Terminal Voltage vs. Ambient Temperature**

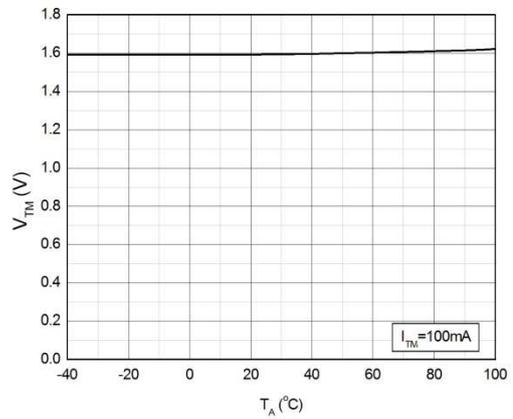


**Fig.9 On-state Terminal Voltage vs. On-state Terminal Current**

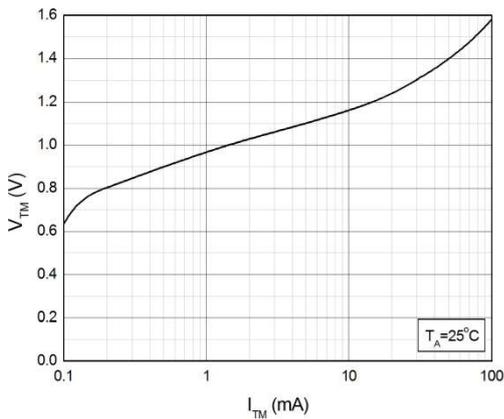


**Fig.10 Holding Current vs. Ambient Temperature**

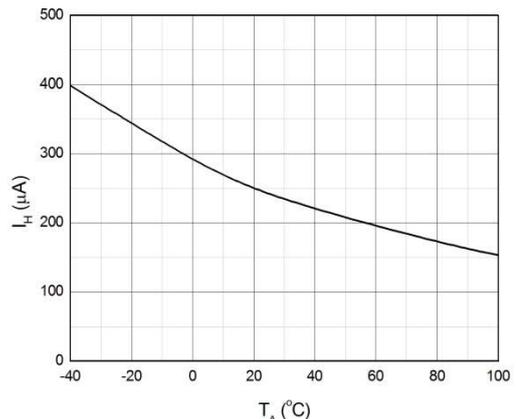

**Fig.11 Normalized Inhibit Voltage vs. Ambient Temperature**

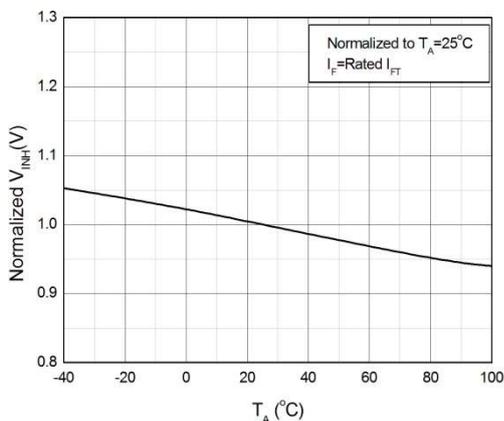


**Fig.12 Normalized Leakage in Inhibit State vs. Ambient Temperature**

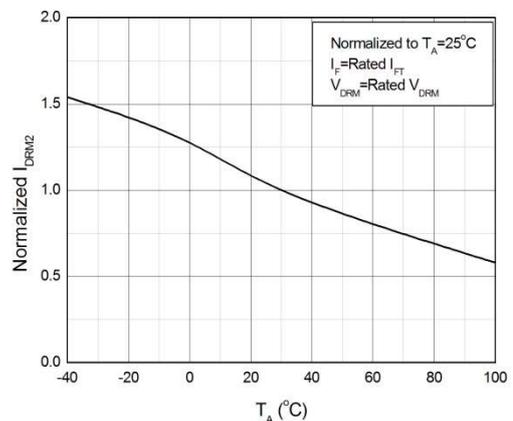


**CHARACTERISTIC CURVES**

**Fig.13 Turn On Time vs. Forward Current**

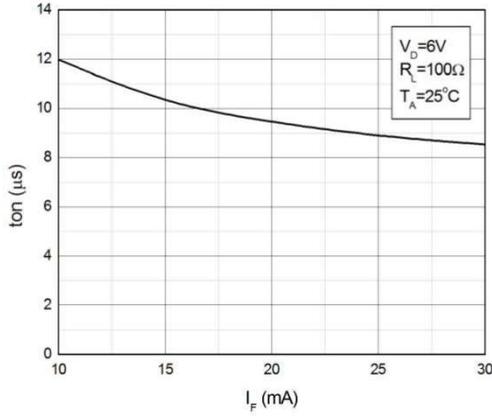


**Fig.14 Turn On Time vs. Ambient Temperature**

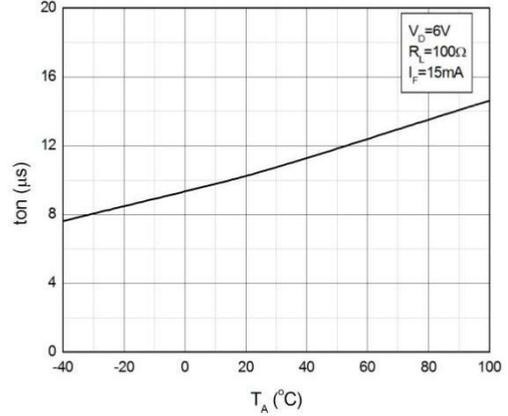


**TEST CIRCUITS**


**Fig.15 Test Circuits of Turn On Time**

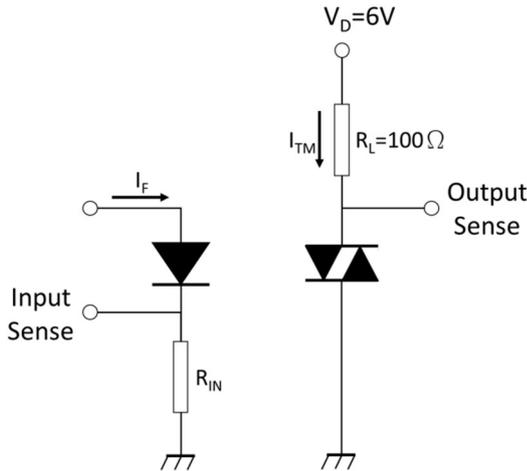


**Fig.16 Waveforms of Turn On Time**

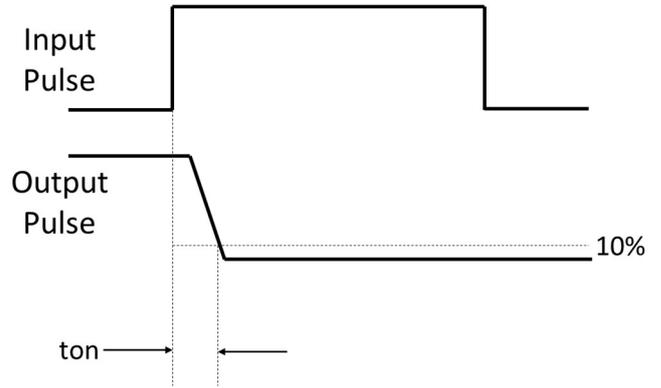

**Fig.17 Test Circuits of dV/dt**

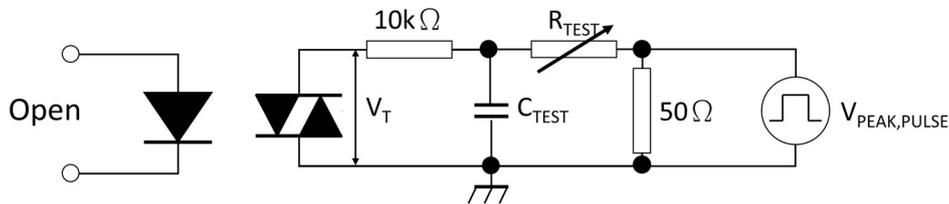


**Fig.18 Waveforms of dV/dt**

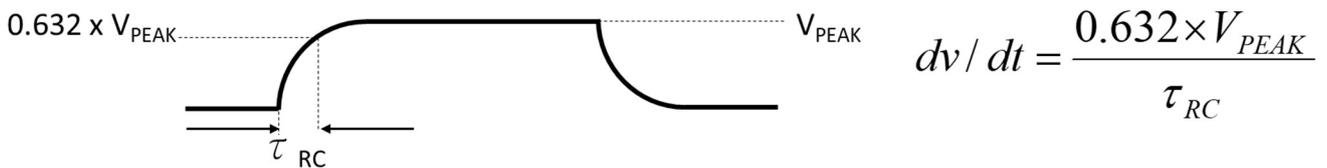


**PACKAGE DIMENSIONS (Dimensions in mm unless otherwise stated)**

**Standard DIP – Through Hole (P Type)**

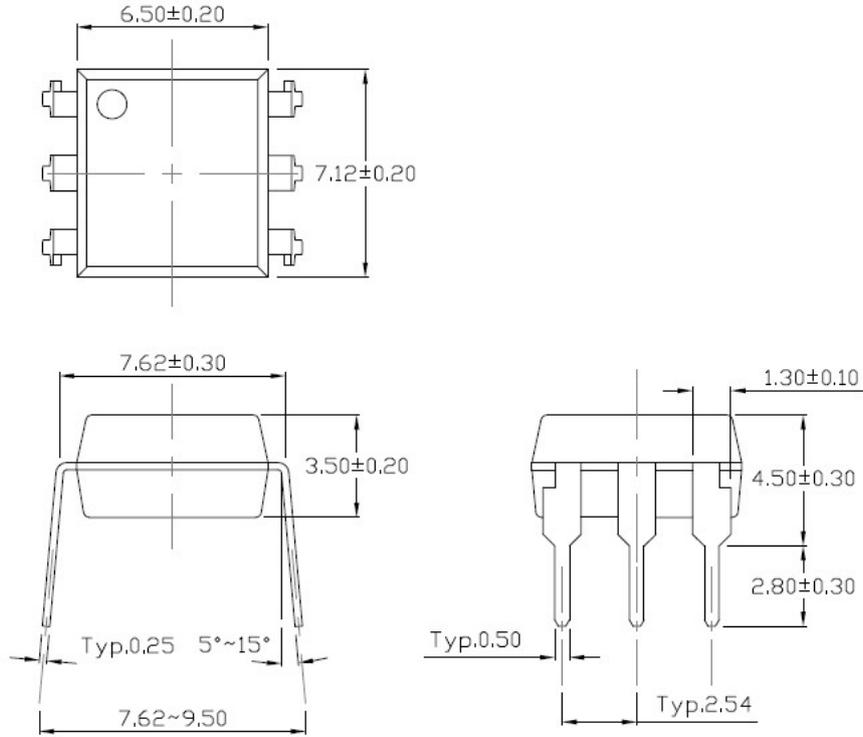


**Gullwing (400mil) Lead Forming – Through Hole (G Type)**

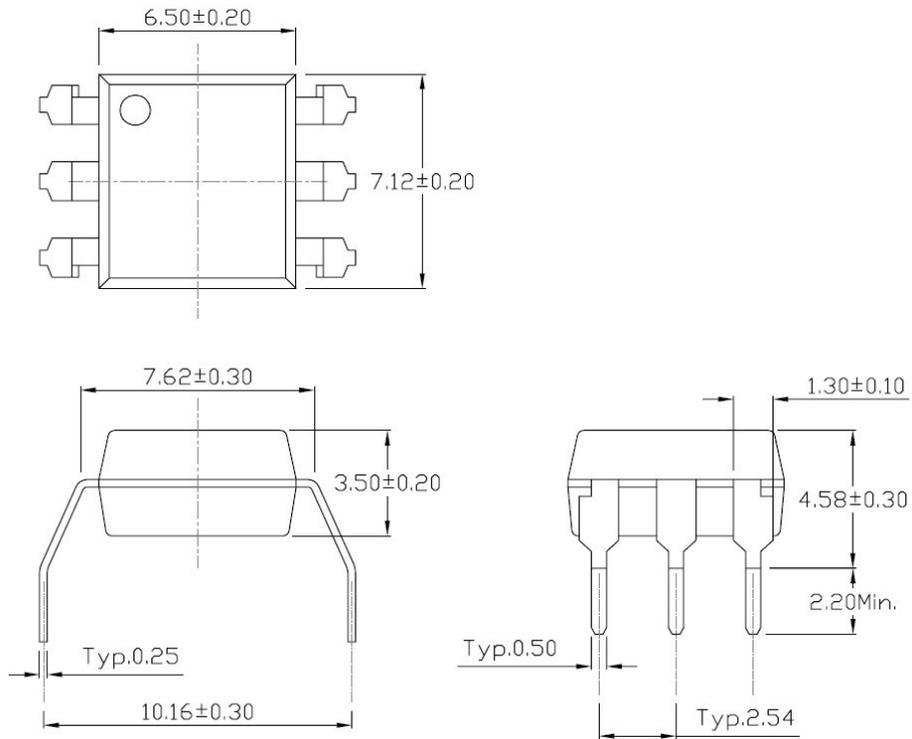


**PACKAGE DIMENSIONS (Dimensions in mm unless otherwise stated)**

**Surface Mount (Low Profile) Lead Forming (S Type)**

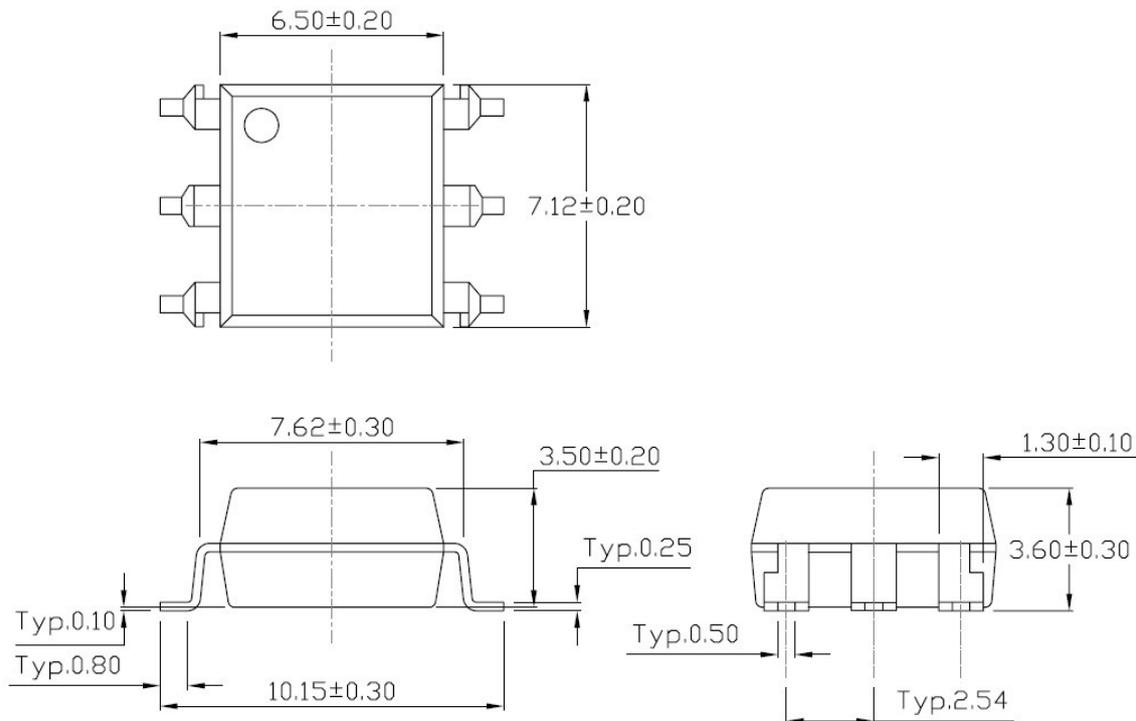


**RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)**

**Surface Mount Lead Forming & Surface Mount (Low Profile) Lead Forming**

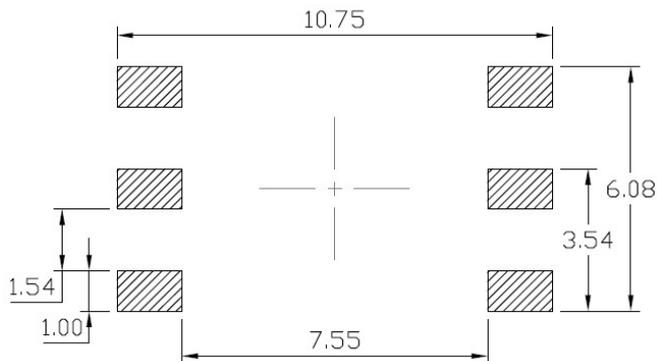


**Surface Mount (Gullwing) Lead Forming**

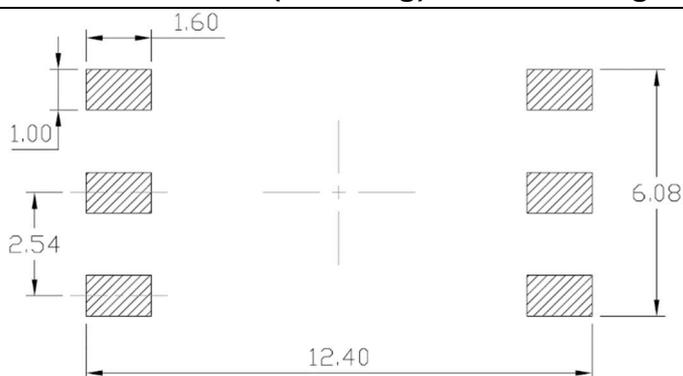


**CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)**

**Option S(T1)**

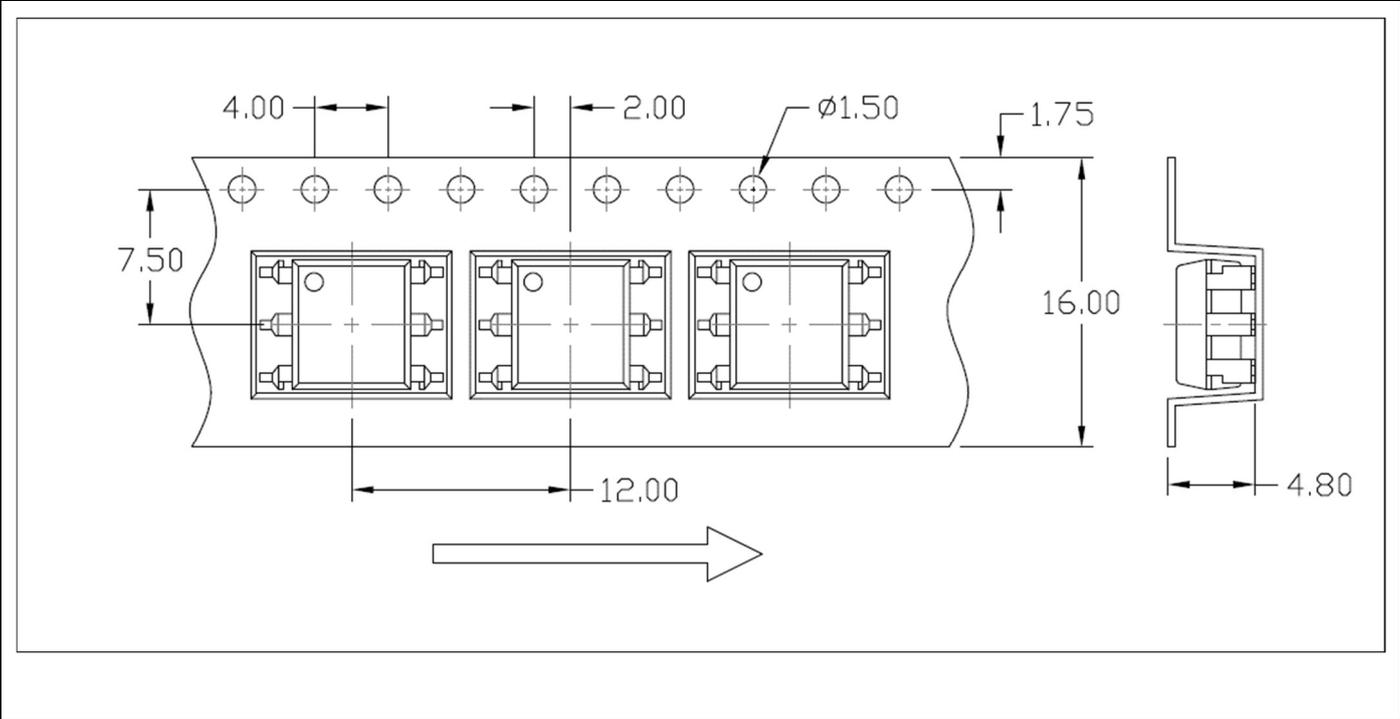


**REEL SPECIFICATIONS (Dimensions in mm unless otherwise stated)**

**Option S**

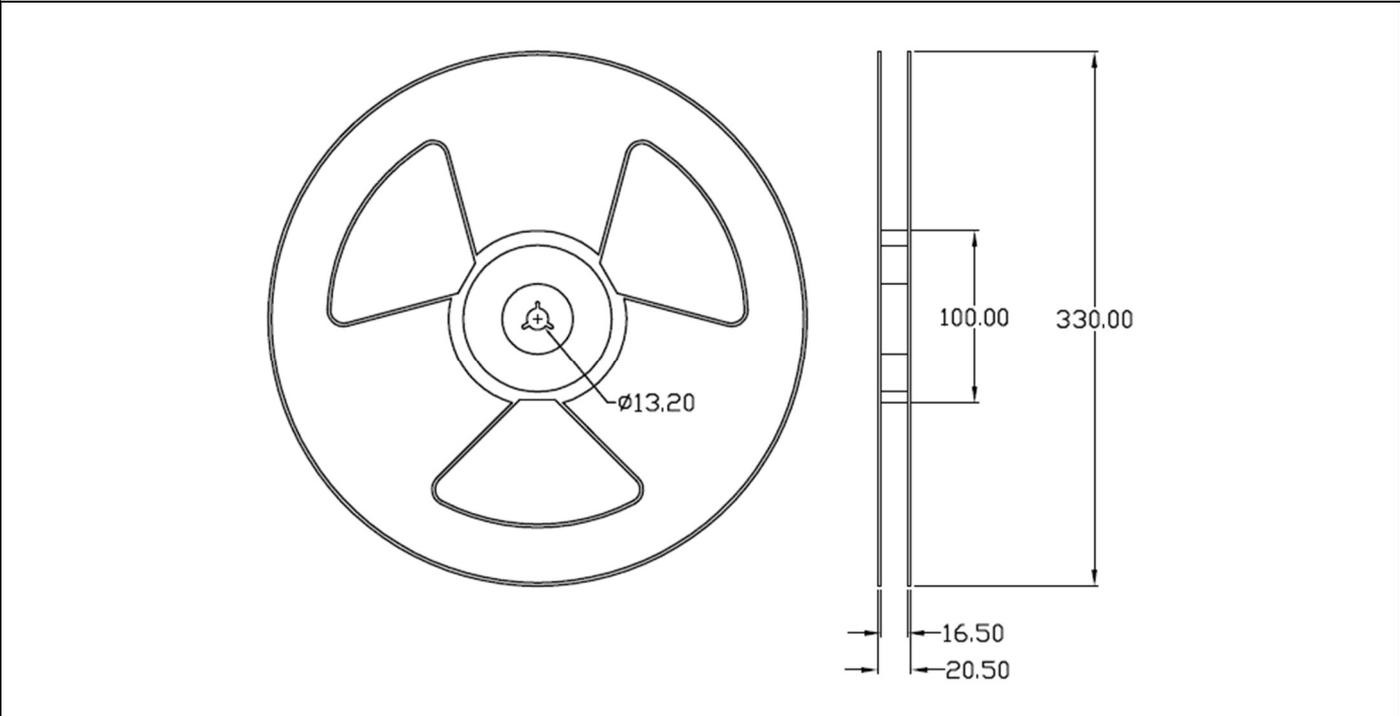

**ORDERING AND MARKING INFORMATION**

**MARKING INFORMATION**

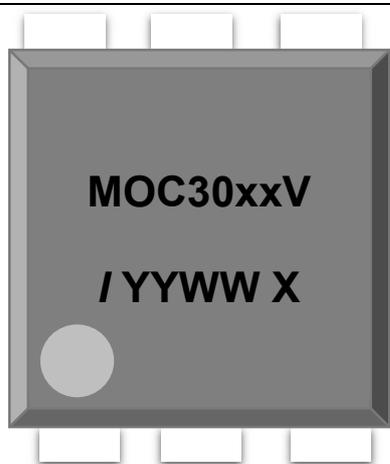

**MOC** : TRIAC Coupler  
**30xx** : Part Number  
**V** : VDE Option  
**/** : ISOCOM MICRON  
**YY** : Manufacture Year  
**WW** : Work Week  
**X** : Manufacturing Code, A/B/C/None

**ORDERING INFORMATION**

**MOC30XXV(G/P/S)E**


MOC – TRIAC Coupler  
 30xx – Part Number (31/32/33/41/42/43/61/62/63/81/82/83)  
 V – VDE Option (V or None)  
 G/P/S – Lead Form Option, G-Gullwing, P-DIP, S-SL  
 E/Z –E: Halogen-free, Lead-free  
 Z: Halogen, Lead-free

**Packing Quantity**

Option	Quantity	Quantity – Inner box	Quantity – Outer box
G	50 Units/Tube	20 Tubes/Inner box	6 Inner box/Outer box = 6k Units
P	50 Units/Tube	20 Tubes/Inner box	6 Inner box/Outer box = 6k Units
S	1000 Units/Reel	2 Reels/Inner box	5 Inner box/Outer box = 10k Units

**REFLOW INFORMATION**

**REFLOW PROFILE**

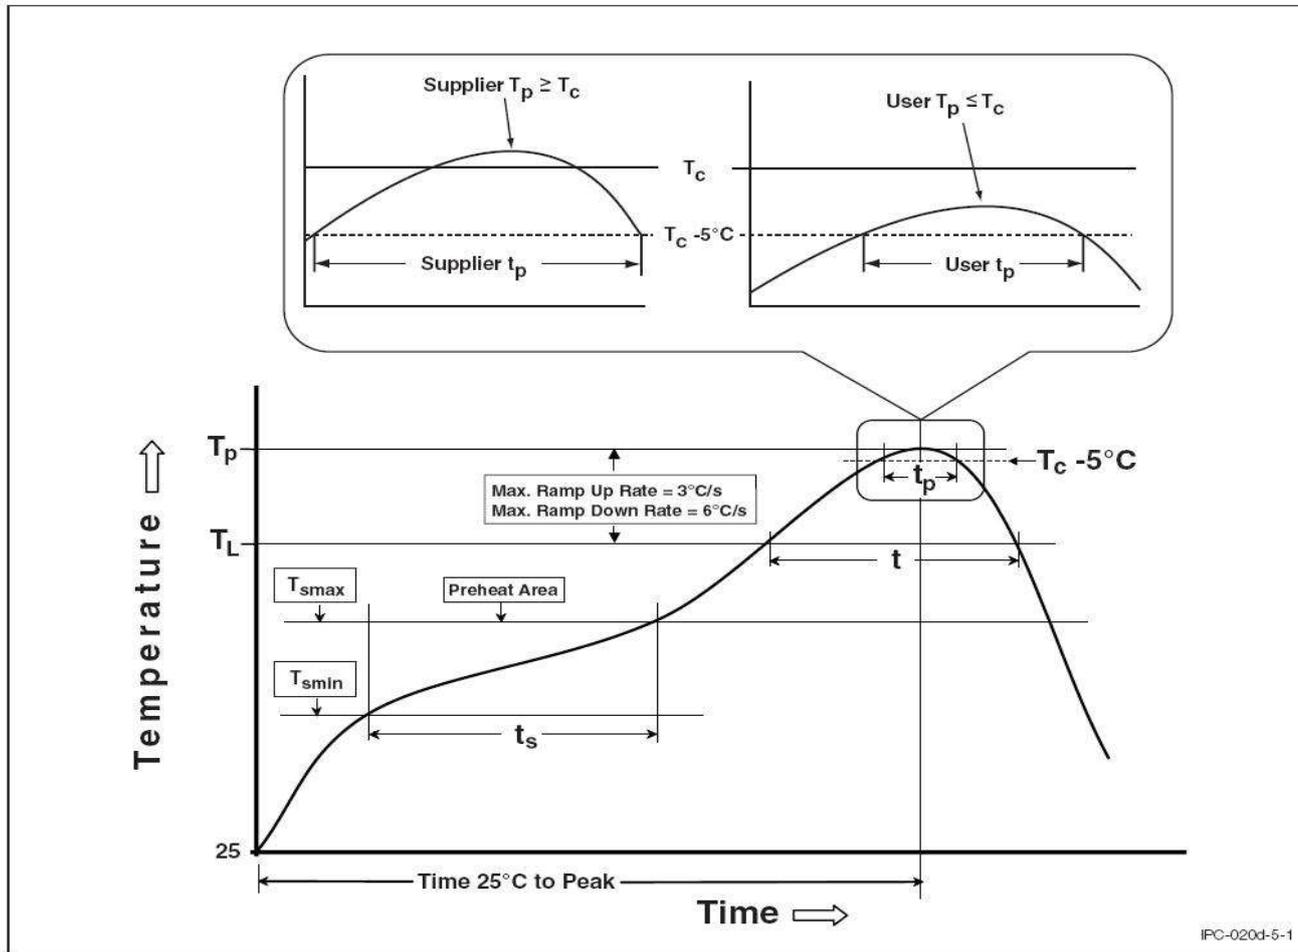

Profile Feature	Sn-Pb Assembly Profile	Pb-Free Assembly Profile
Temperature Min. ( $T_{smin}$ )	100	150°C
Temperature Max. ( $T_{smax}$ )	150	200°C
Time ( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ )	60-120 seconds	60-120 seconds
Ramp-up Rate ( $t_L$ to $T_p$ )	3°C/second max.	3°C/second max.
Liquidous Temperature ( $T_L$ )	183°C	217°C
Time ( $t_L$ ) Maintained Above ( $T_L$ )	60 – 150 seconds	60 – 150 seconds
Peak Body Package Temperature	235°C +0°C / -5°C	260°C +0°C / -5°C
Time ( $t_p$ ) within 5°C of 260°C	20 seconds	30 seconds
Ramp-down Rate ( $T_p$ to $T_L$ )	6°C/second max	6°C/second max
Time 25°C to Peak Temperature	6 minutes max.	8 minutes max.

**DISCLAIMER**

- ISOCOM MICRON is continually improving the quality, reliability, function and design. ISOCOM MICRON reserves the right to make changes without further notices.
- The characteristic curves shown in this datasheet are representing typical performance which are not guaranteed.
- ISOCOM MICRON makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, ISOCOM MICRON disclaims (a) any and all liability arising out of the application or use of any product, (b) any and all liability, including without limitation special, consequential or incidental damages, and (c) any and all implied warranties, including warranties of fitness for particular
- The products shown in this publication are designed for the general use in electronic applications such as office automation, equipment, communications devices, audio/visual equipment, electrical application and instrumentation purpose, non-infringement and merchantability.
- This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or lifesaving applications or any other application which can result in human injury or death.
- Please contact ISOCOM MICRON sales agent for special application request.
- Immerse unit's body in solder paste is not recommended.
- Parameters provided in datasheets may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated in each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify ISOCOM MICRON's terms and conditions of purchase, including but not limited to the warranty expressed therein.
- Discoloration might be occurred on the package surface after soldering, reflow or long-time use. It neither impacts the performance nor reliability.