


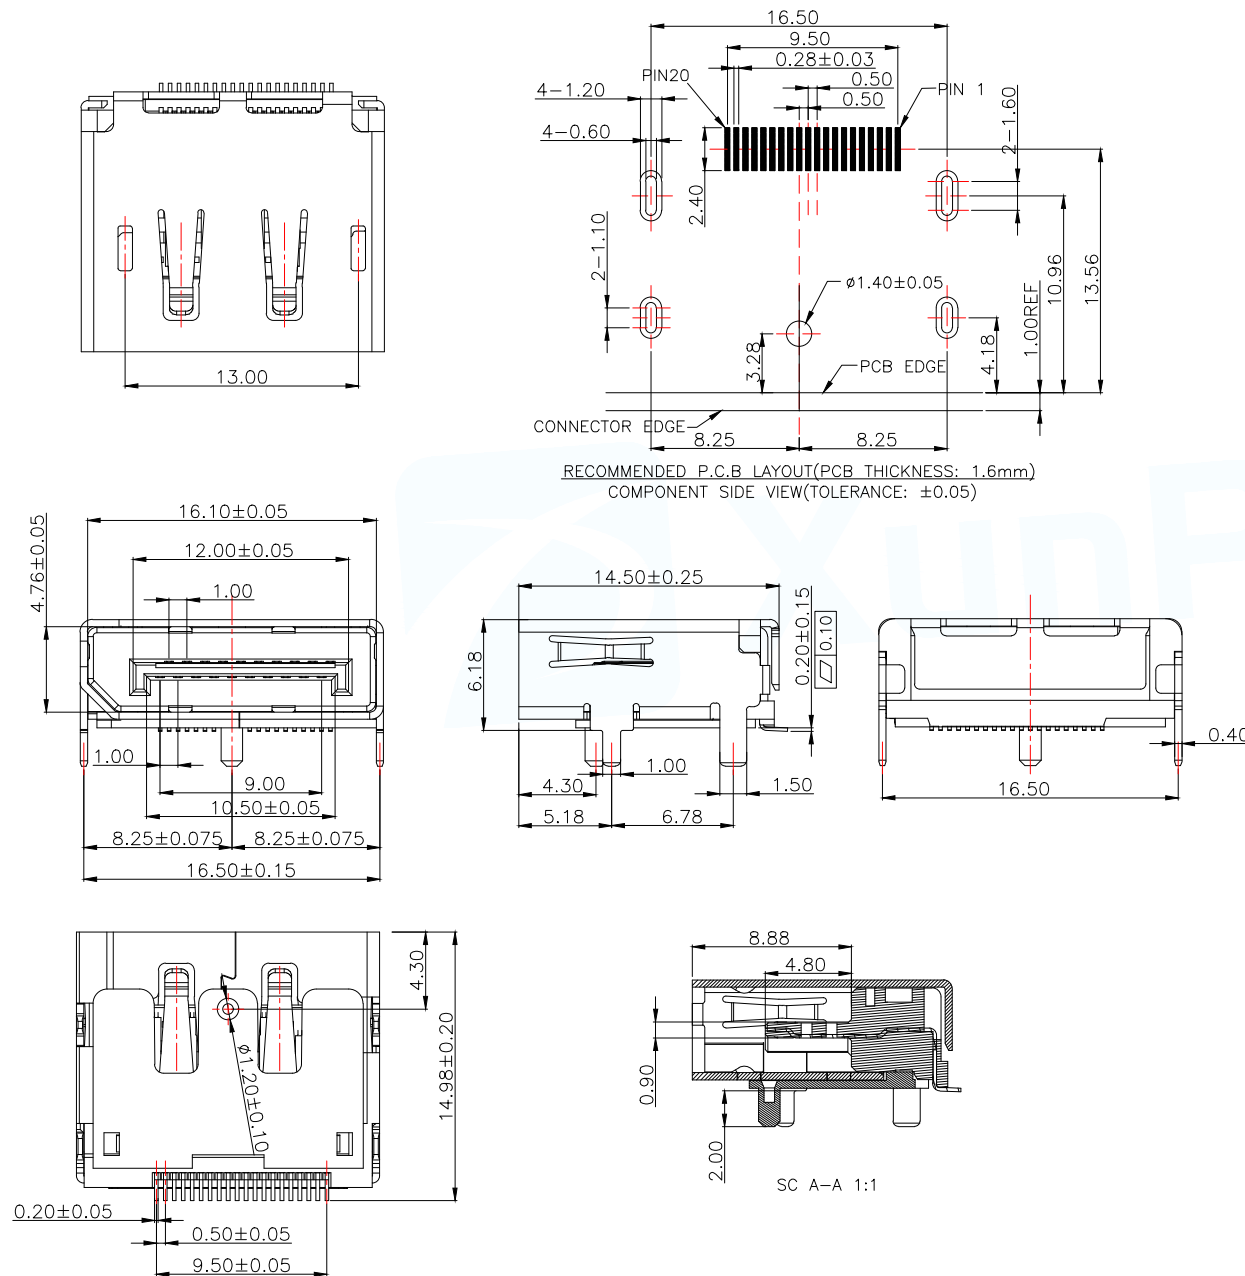

NOTE:

1.MATERIAL:

- 1.1 HOUSING: LCP, UL 94V-0 COLOR: BLACK.
- 1.2 CONTACT: C2680, T=0.20mm.
- 1.3 SHIELD: C2680, T=0.40mm.
- 1.4 COVER: LCP,UL 94V-0

2.FINISH:

- 2.1 CONTACT: GOLD(1U") PLATING IN CONTACT AREA, 50u"MIN Tin PLATED IN SOLDER AREA,50u" MIN. NICKEL UNDERPLATED OVERALL.
- 2.2 SHIELD: 50u" MIN. NICKEL UNDERPLATED OVERALL.

3.MECHANICAL CHARACTERISTICS

- 3.1 RATING CURRENT: 0.5A
- 3.2 RATING VOLTAGE: 40V
- 3.3 CONTACT RESISTANCE: 40 mΩ MAX
- 3.4 INSULATION RESISTANCE a, UNMATED: 100MΩ MIN AT 500 VDC b, MATED: 10M OHMS MIN AT 150 VDC
- 3.5 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/1MINUTE
- 3.6 DURABILITY: 10000 CYCLES.

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: DP 20P CONN
			PAR DP-001-C-W
DECIMALS:	ANGLES:		DWN
X.X:±0.25	X.:±1.5°		CHKD
X.XX:±0.15	X.X:±1.0°		APVD
X.XXX:±0.10		CUSTOMER COPY	SCALE1:1 UNIT:MM
			SIZE:A4 SHEET:1F1
			REV:A

前空10格

中间装300PCS产品

后空10格

4.00

 $\phi 1.50$ 28.40
32.00

20.00

PCS/卷

卷/箱

PCS/箱

300

10

3000

客户使用出料方向

四周角落填充三角垫

纸箱内上下各垫一层纸板

标签

防水袋

10格

38 CM

34.5CM

34.5CM

MANUFACTURE DWG

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:

X.X:±0.25

X.XX:±0.15

X.XXX:±0.10

ANGLES:

X.°:±1.5°

X.X:±1.0°

东莞市讯普电子科技有限公司
DongGuan XunPu Electronics Co.,LtdTITLE:
DP 20P CONN

PAR

DP-001-C-W

DWN

CHKD

APVD

SCALE:1:1

UNIT:MM

SIZE:A4

SHEET:1F1

REV:A